
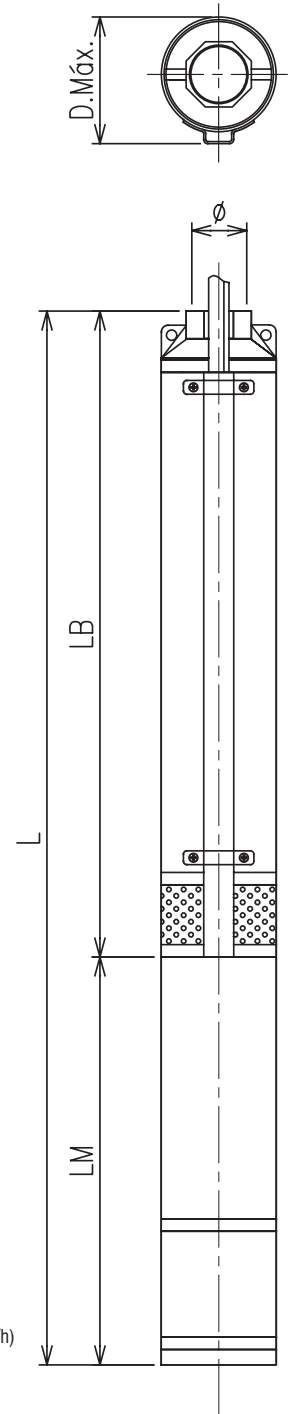


### CURVA DE PERFORMANCE

60Hz

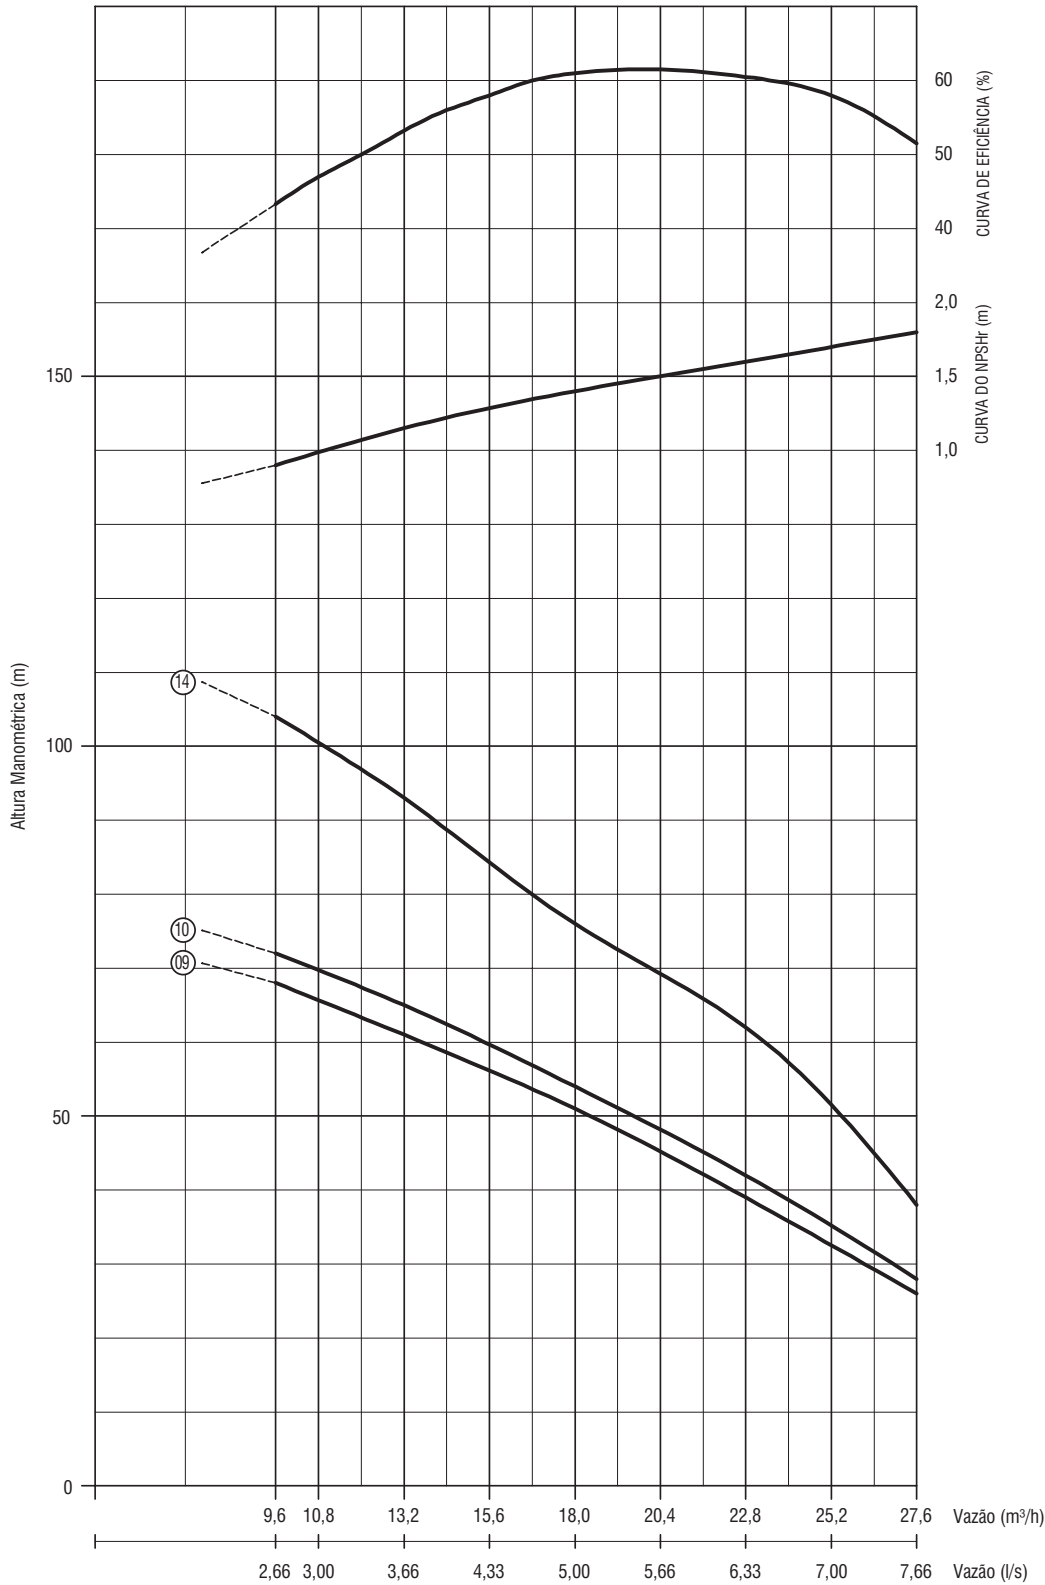

## TABELA PARA SELEÇÃO DE EQUIPAMENTOS

BOMBA MODELO	N° EST.	MOTOR MODELO	POTÊNCIA		VAZÃO E ALTURA MANOMÉTRICA												LB	TRIF			MONO			MONO			Ø POL BSP																
			HP	kW	0,0	9,6	10,8	12,0	13,2	14,4	15,6	16,8	18,0	20,4	22,8	25,2		27,6	m	220V			380V			440V			D máx. (mm)														
																				LM	L	kg	LM	L	kg	LM		L		kg	LM	L	kg	LM	L	kg							
4BPS18-09	09	M4P7	5,50	4,1															746	790	1536	36,90	790	1536	36,90																		
		OM4A	5,50	4,1																746	675	1421	26,72	675	1421	26,81																	
		OP4	5,00	3,73	82,0	68,0	66,0	63,0	61,0	50,0	56,0	53,0	51,0	45,0	39,0	33,0	26,0	m																									
		4WP	5,00	3,73																	746																						
		4WP	5,50	4,1																	746	555	1301	30,30	555	1301	30,30																
4BPS18-10	10	M4P7	6,00	4,47																806	790	1596	37,50	790	1596	37,50																	
		OM4A	5,50	4,1	86,0	72,0	70,0	67,0	65,0	64,0	60,0	57,0	54,0	48,0	42,0	36,0	28,0	m																									
		4WP	5,50	4,1																	806	555	1361	30,90	555	1361	30,90																
4BPS18-14	14	M4P7	7,50	5,59																1079	790	1869	39,90	790	1869	39,90																	
		OM4A	7,50	5,59	126,0	104,0	101,0	97,0	93,0	89,0	85,0	80,0	76,0	67,0	62,0	48,0	38,0	m																									
		4WP	7,50	5,59																	1079	675	1754	39,30	675	1754	39,30																