



TH 125-315

BOMBA NORMALIZADA



ROTAÇÃO / SPEED / REVOLUCIONES

1.750

rpm

60

Hz

ROTOR / IMPELLER / IMPULSOR

DIÂMETRO / DIAMETER / DIÁMETRO

332/279

mm

LARGURA / WIDTH / ANCHO

30

mm

ESTÁGIOS
Mínimo(1) Máximo (1)

SUCÇÃO / SUCTION / ASPIRACIÓN

150

mm

6"

RECALQUE / DISCHARGE / DESCARGA

125

mm




5"

Flanges conforme normas ANSI B16.1 ou
DIN EN 1092-2/97 (Opcional)
Flanges according standards ANSI B16.1 or
DIN EN 1092-2/97 (Optional)
Bridas según las normas ANSI B16.1 ó
DIN EN 1092-2/97 (Opcional)

Observação: A tabela abaixo considera utilização do
Fator de Serviço (FS) do motor que é de 1,15.

Note: The table below take into account the Service
Factor of the electric motor that is 1.15.

Observación: La tabla abajo considera el uso del
factor de servicio de 1,15 del motor.

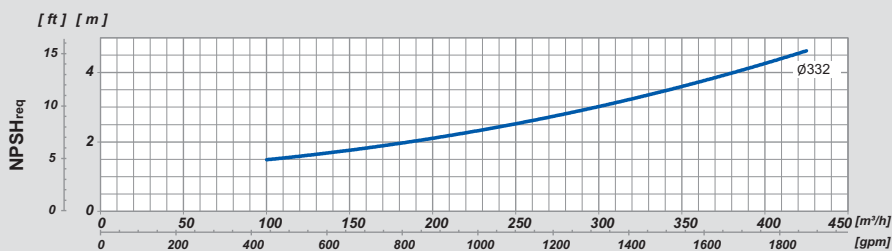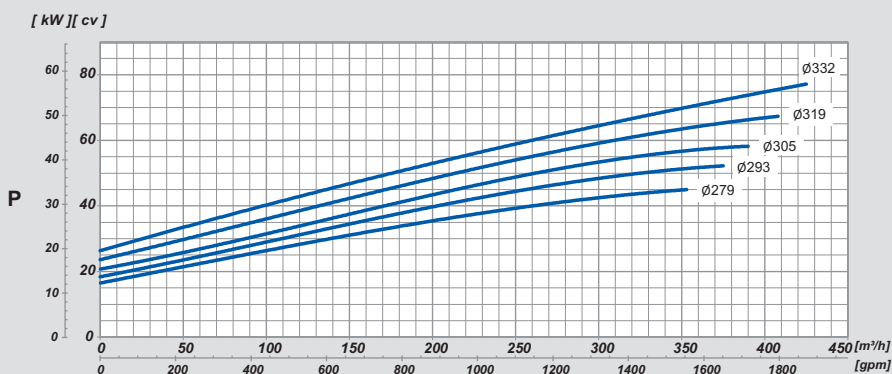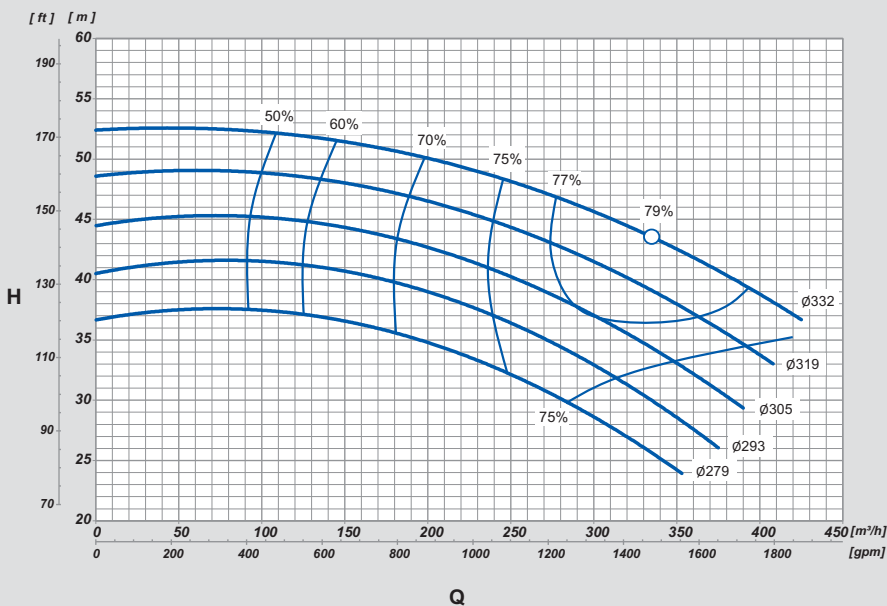

MODELO MODEL MODELO	ROTOR IMPELLER IMPULSOR [mm]	ALTURA MANOMÉTRICA / HEAD / ALTURA DE BOMBEO (mc.á.)																									ALTURA MÁXIMA MAXIMUM HEAD ALTURA MÁXIMA								
		25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	42	44	46	48	50	52	54											
		VAZÃO / FLOW RATE / CAUDAL [m³/h]																																	
TH-125/315	279	343,8	332,1	320,5	308,8	293,9	279,0	264,0	245,4	225,7	207,2	188,9	171,6	148,4												37,0									
		50,0 cv			40,0 cv										30,0 cv																				
TH-125/315	293					345,4	333,6	321,7	309,9	297,7	283,6	269,5	254,1	235,8	217,5	198,9	171,0									40,4									
						50,0 cv										40,0 cv																			
TH-125/315	305						382,4	370,5	358,7	346,8	335,0	323,1	311,3	299,4	284,6	268,4	252,2	217,6	157,1							44,4									
						60,0 cv					50,0 cv										40,0 cv														
TH-125/315	319										397,0	385,9	374,2	361,9	349,6	335,4	321,2	291,4	256,1	211,5	150,6					48,6									
											75,0 cv					60,0 cv										50,0 cv					40,0 cv				
TH-125/315	332															396,7	383,3	356,7	325,0	290,0	250,0	210,0	100,0			52,5									
																					75,0 cv					60,0 cv									